

RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

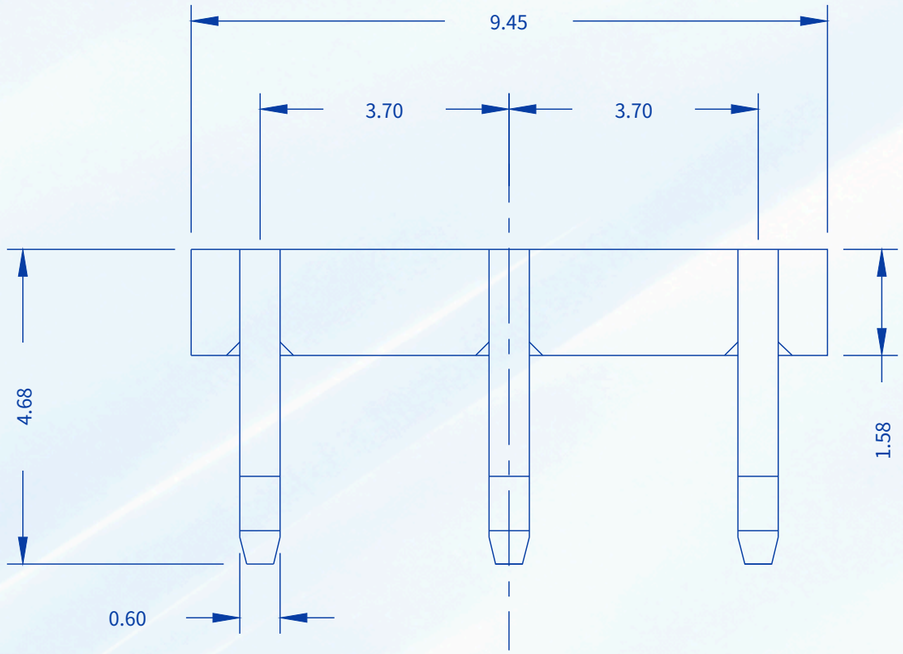

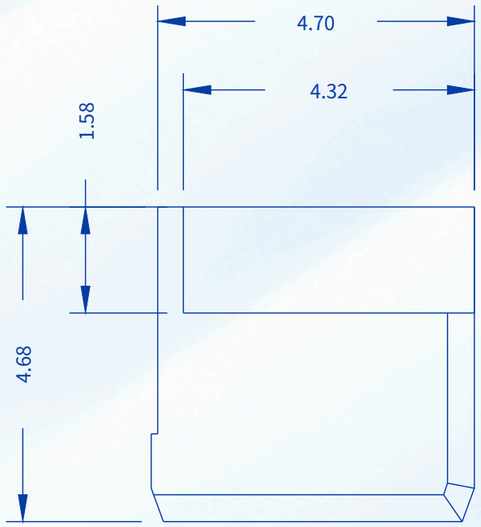

MATERIAL / SPECIFICATION	
Housing	LCP E130i / UL94V-0 / 30% G.F
Short terminal	C2680R-H / Quantity: 1
Long terminal	C2680R-H / Quantity: 2
Terminal finish	1 µin Au
Housing quantity	1
Draft where applicable	Must remain within dimensions

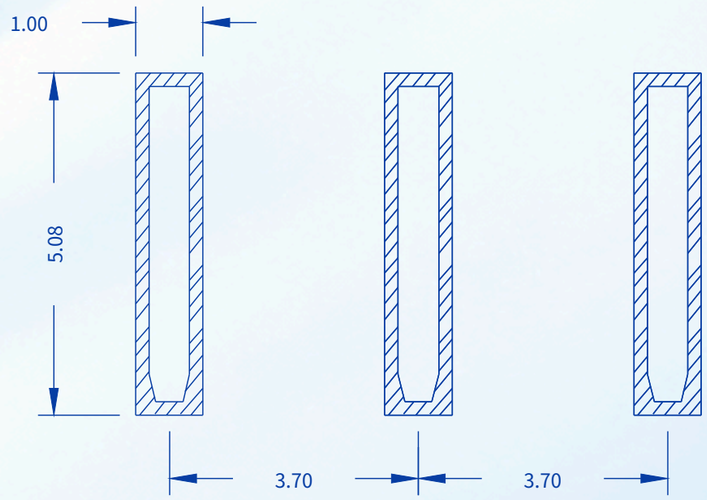

PCB LAYOUT

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.X (mm)	±0.25
.XX (mm)	±0.15
.XXX (mm)	±0.05
ANGULAR	±1°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	3.7 mm Pitch 4.68 mm Height SMT Blade Battery Connector (3 Pin) No Locating Post						
PART NO.	KS-BL370-03M-S468					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1