


RoHS Compliant


REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

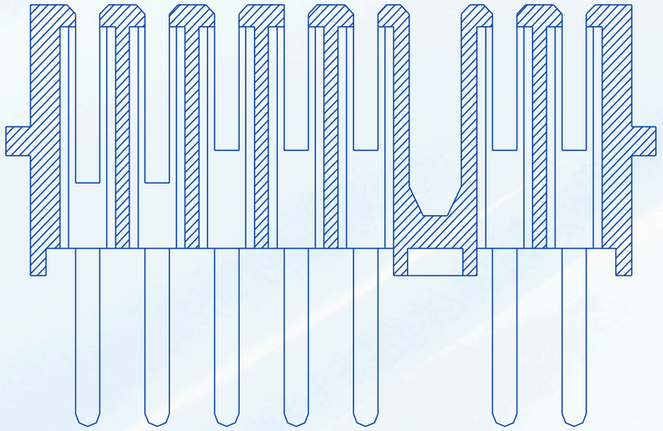

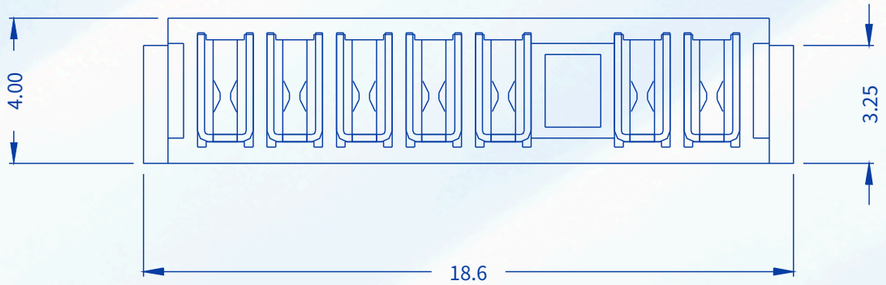


MATERIAL / SPECIFICATION	
Insulator	Nylon 9T (UL94V-0)
Contact	Phosphor Bronze
Contact plated	Gold over Nickel or Tin
Current rating	5A
Instant current	7A
Contact resistance	30mΩ
Insulation resistance	100MΩ
Dielectric voltage	500V
Operating temperature	−40° ~ 105°
Key position	Right; front position posts
Housing color	Black

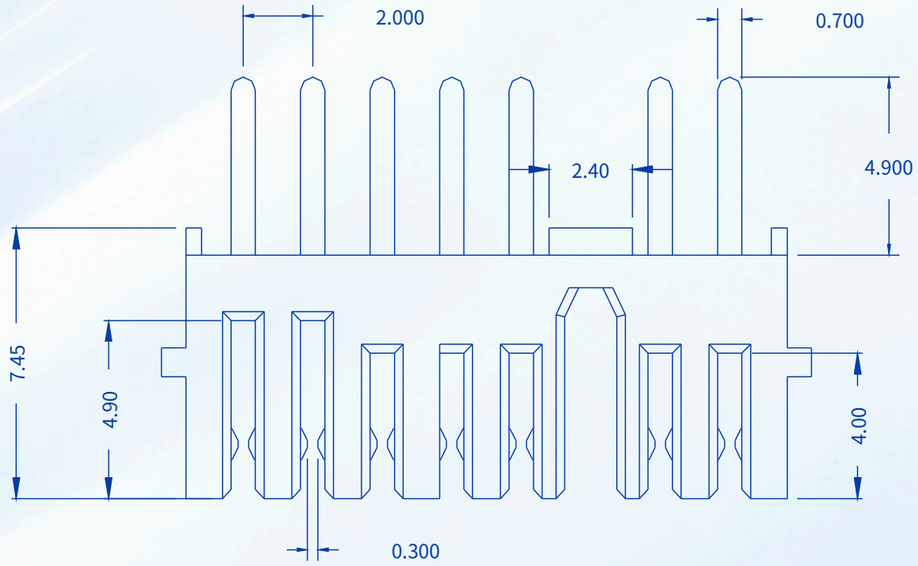

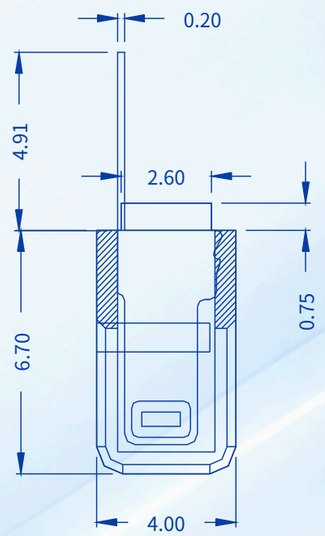

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
XX.	±5
X.	±0.5
.X	±0.2
.XX	±0.10
XX.°	±1°
X.°	±0.5°
.X°	±0.25°
.XX°	±0.1°

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch 7.45 mm Height Vertical Through-Hole Female Blade Battery Connector (7 Pin) Right-Keyed Keyed							
PART NO.	KS-BL200-07F-VD745K						REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1	