

RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

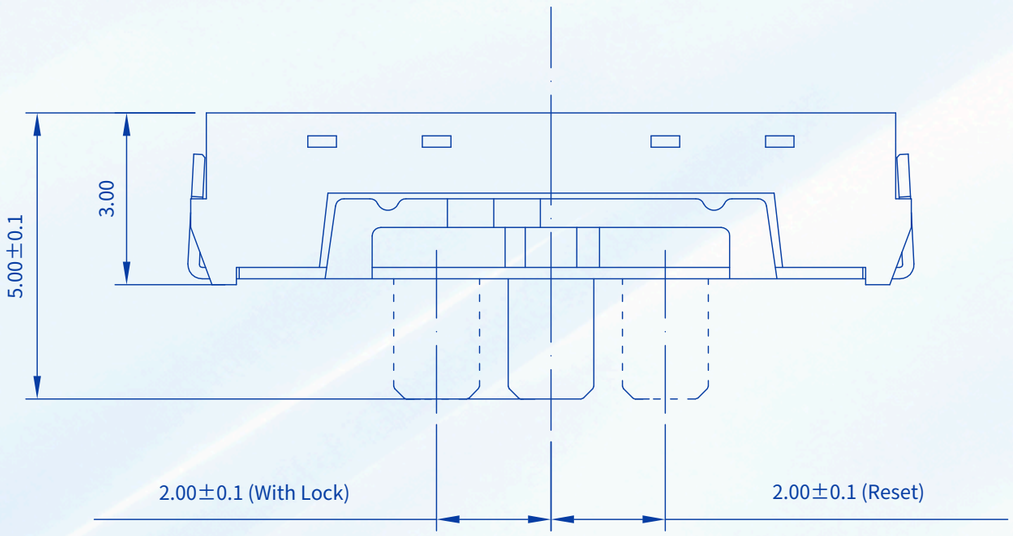


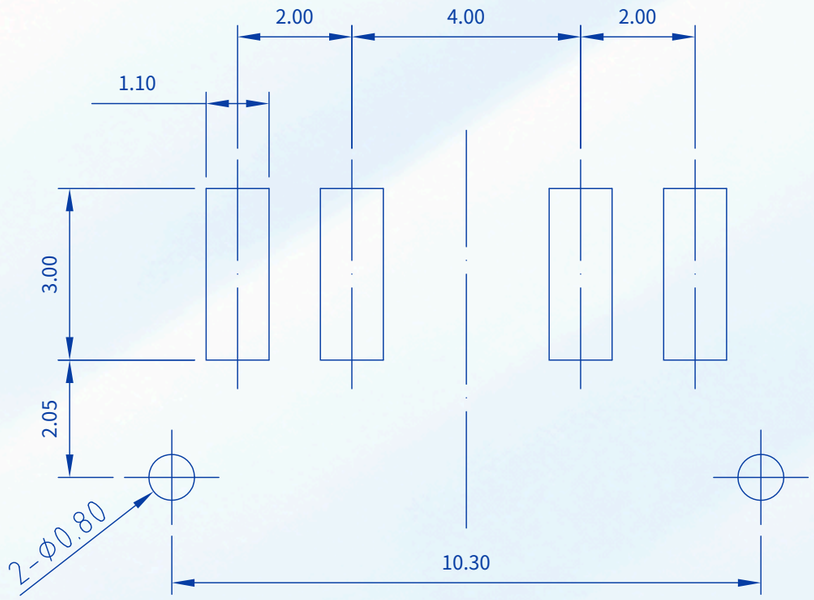


PCB Soldering Dimensions

MATERIAL / SPECIFICATION	
Rated Current	50mA
Rated Voltage	DC12V
Contact Resistance	⩽70mΩ
Insulation Resistance	⩾100MΩ
Compressive Strength	AC250V 50Hz/1min
Operating Force	200±50gf
Mechanical Life	50,000 cycles Min
Operation Stroke	2.00±0.2mm
Temperature Range	-25°C ~ +70°C

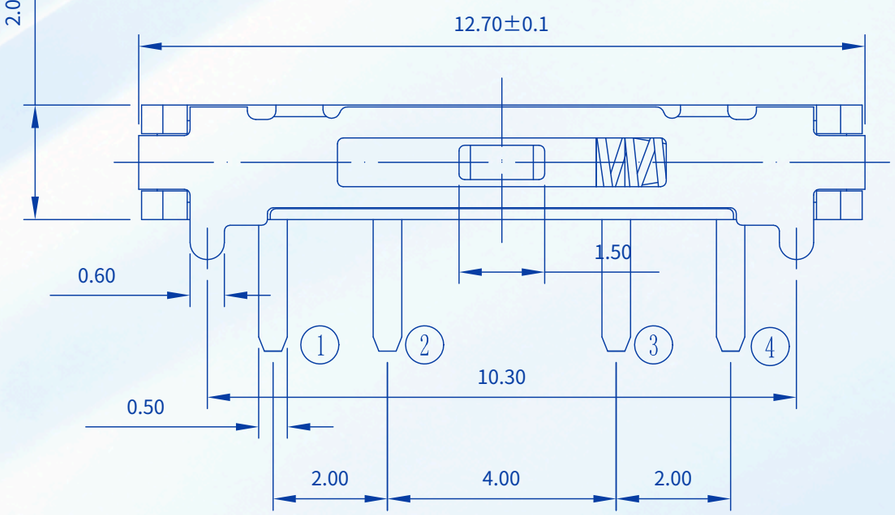

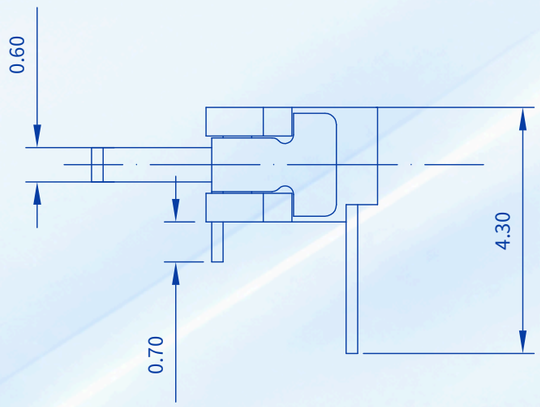

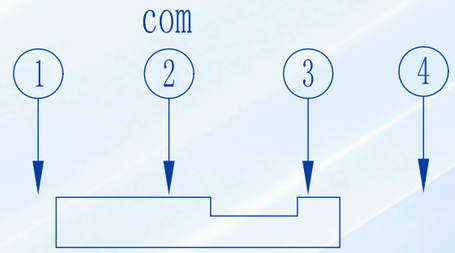

Electrical Schematic

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 4 Pin SMD With Locating Post							
PART NO.	KS-SS-SK-24B						REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1	