

RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

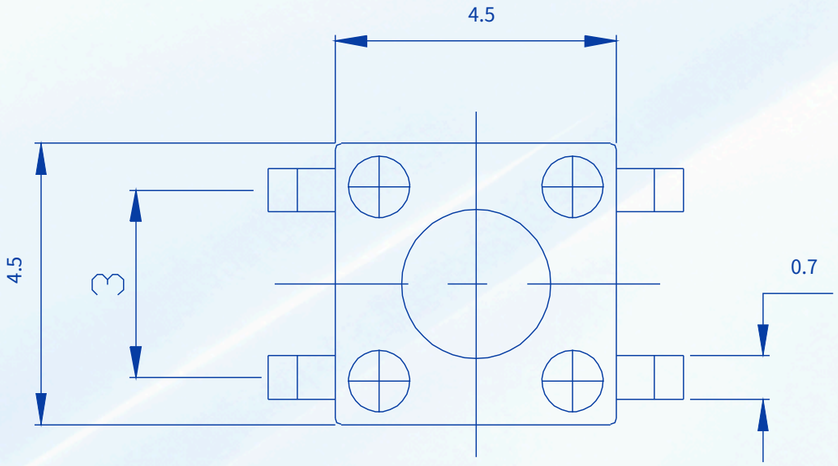

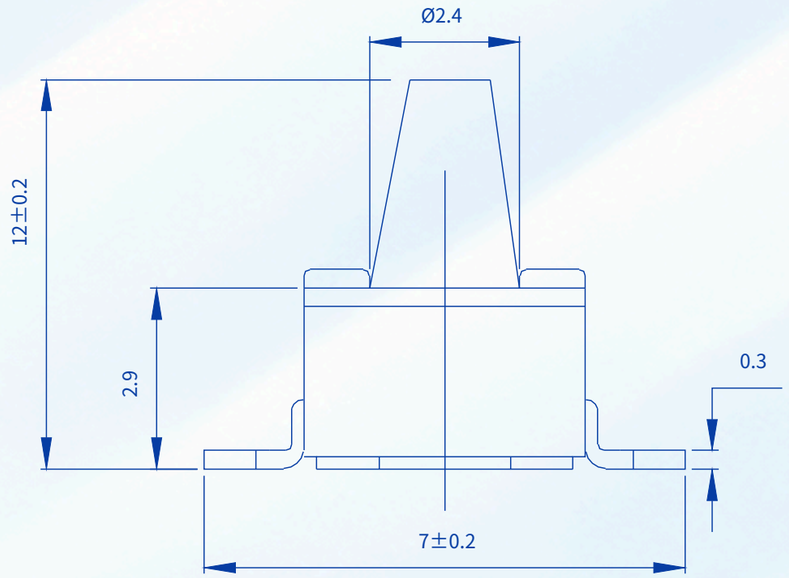

Model and Specification Code Table			
Code	Meaning	Code	Meaning
Model	KAN4541	1	Handle Color (Black)
Specification	1201260F	260	Actuation Force Specification
KAN	Tactile Switch Main Code	B	Stainless Steel (Spring Piece)
06	Base Outline Size	F	Phosphor Bronze Silver-Clad (Spring Piece)
1	Mounting Type	L	Phosphor Bronze (Spring Piece)
1(0)	Design Serial No. (0 = Square-Head Product)		
050	Product Height		

MATERIAL / SPECIFICATION	
Height H	3.8 / 4.5 / 4.8 / 5 / 7
Travel	0.25±0.1 mm
Rated Voltage, Current	DC12V/50mA
Contact Resistance	50 mΩ (max)
Insulation Resistance	100 MΩ (min)
Dielectric Strength	250V AC/1min
Operating Force	260 (±50gf)
Life	100,000 cycles
Dimensions	Unmarked tolerances per GB/T1804—2000

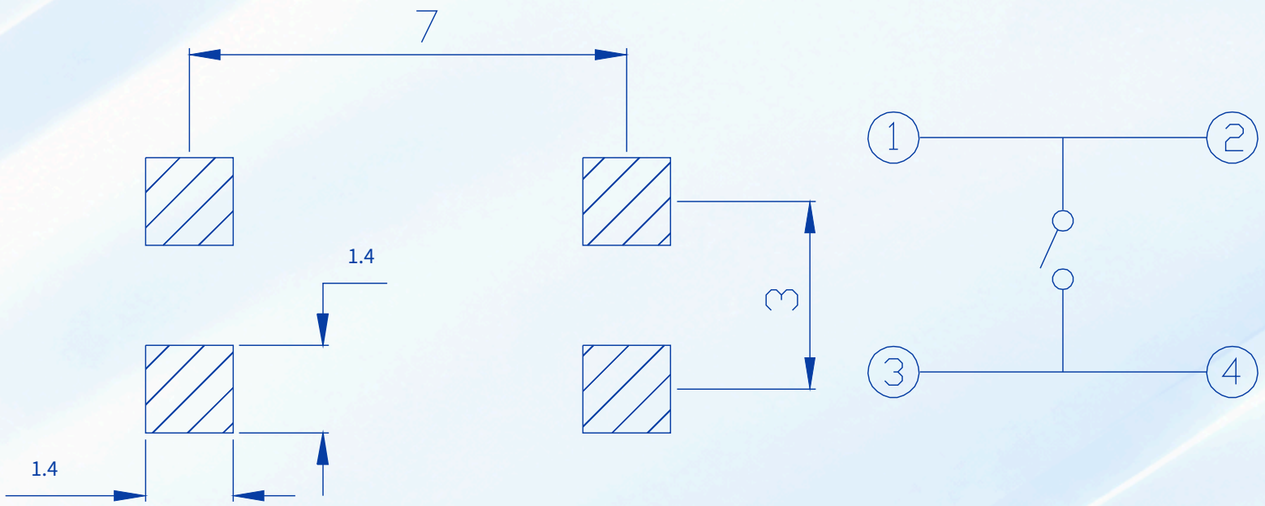

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION THIRD ANGLE PROJECTION	DRAWN BY	KANGSHENG
		CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Tactile Switch 4.5×4.5 4 Pin SMD							
PART NO.	KS-TS-4545-S-01						REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1	